

GHK-08OP-NA

FEATURES

- SVGA (800 x 600) (220 cd/m2)
- VGA & DVI Signal Input
- OSD Control on the Back Side
- DC 12V Power Input
- Integrated Industry-Standard Design
- Support Embedded Mounting



RoHS



8.4
Inch
TFT






OEM
ODM

PRODUCT SPECIFICATIONS

LCD	
Panel Type	AU LCD Panel (Optional)
Resolution (pixel)	800*600
Display Area (mm)	170.4(H)x127.8(V)
Brightness (nit)	220nit (Optional)
Contrast Ratio	600:1
Colors	16.2M / 252k colors
View Angle (U/D/L/R)	75/75/75/75
Backlight Lifetime	50000hrs
OSD Control	Auto Menu Select (+,-) Exit On/Off
Touch Screen	
Type	NO(Optional)
Resolution(pixel)	NO
Transmittance	NO
Interface	
Signal Input	VGA+DVI (15 Pin D-sub/DVI-D Connector) AV Input / Video Input /Audio Input (Optional)
Touch Connectors	USB / RS232(Optional)
Power	
Power Input	DC-in 12V=4A (50~61HZ)-DC Jack (2.0mm)
Power Consumption	≤48W
Mechanical	
Material	High Strength Cold Rolling Steel Chassis
Mounting	Support Embedded Mounting
Dimensions	219.8(H) x 180.0(V) x 33.5(D)
Environment	
Operating Temp	-30~85C°
Storage Temp	-30~85C°
Relative Humidity	10~90% @40C° Non-condensing without touch screen
Vibration	1G peak,5~500Hz(Random)
Shock	15G peak acceleration (11msec.duration)
Rating	Facilitate installation of the demolition, solid portfolio
Ordering Information	
GHK-08OP-NA	8.4" Open Frame Monitor with VGA/DVI input and power adapter (800*600 / 250nit)
GHK-08OP-TA	8.4"Open Frame Touch Monitor with 4 wire resistive touch screen,VGA/DVI input (800*600 / 450nit)

DIMENSIONS

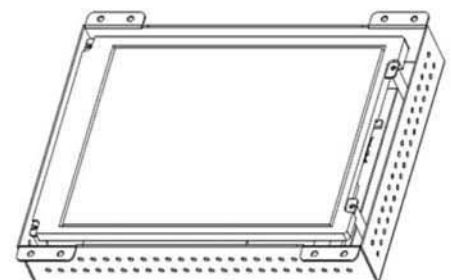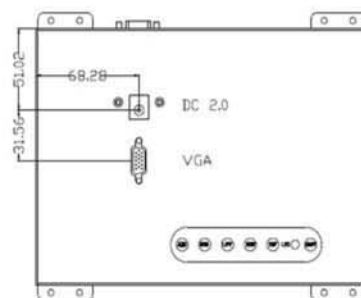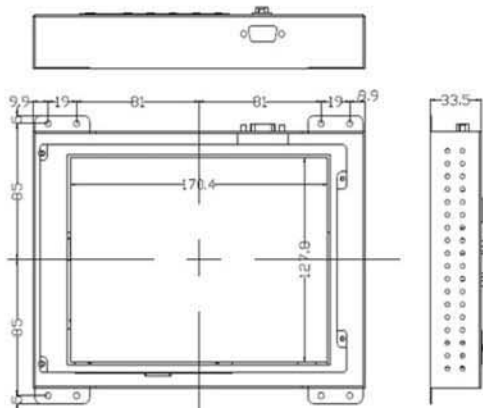

I / O PORT

