

## GHK-15OP-T0000




- \* XGA(1024x768) 250cd/m<sup>2</sup>
- \* VGA Signal Input
- \* IR Touch Screen
- \* Vandalism proof
- \* IP65
- \* Privacy Protection Film (Optional)
- \* Back Light Adjustable Sensor(Optional)
- \* OSD Control on the Back Cover
- \* DC 12V Power Input
- \* Rugged Industry Design
- \* Support Embedded Mounting



### Specifications

LCD Panel	
Panel Type	AUO LCD Panel
Resolution(Pixel)	1024 x 768
Display Area (mm)	H: 246.0 x V: 184.5
Brightness (nit)	250 nits
Contrast Ratio	1000:1
Colors	16.2M
View Angle(U/D/L/R)	70°/60°/80°/80°
Backlight Lifetime	50,000 hours
OSD Control	Auto, Menu, +, -, Exit, Power
Touch Panel	
Type	IR Touch Technology
Resolution	4096 x 4096
Transmittance	>=92%
Interface	
Signal Input	15Pin D-Sub VGA
Touch Connector	USB
Power	
Power Input	DC12V, 4.17A, DC Jack 2.0mm
Power Consumption	<=48W
Mechanical	
Material	High Strength Cold Rolling Stell Chassis
Mounting	Left/Right brackets holes VESA 100mm x 100mm Mount Support Embedded Mounting
Dimensions(mm)	353.2(W) x 50.8(D) x 284.6(H)
Environment	
Operating Temp.	0°~50°C
Storage Temp.	-20°C~60°C
Relative Humidity	10~90%@40°C Non-condensing
Vibration	1G peak, 5~500Hz(Random)
Shock	15G peak Acceleration (11msec.duration)
Rating	Facilitate Installation of the Demolition, Solid Portfolio
Option	
Privacy	3M or other Brand Privacy Filter
Light Control	Backlight Adjustable Sensor

(Unit:mm)

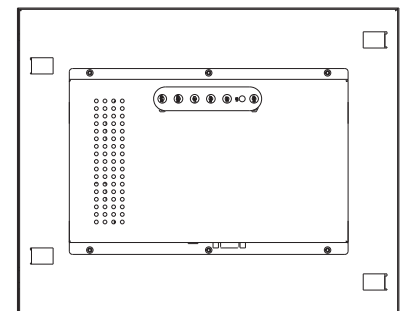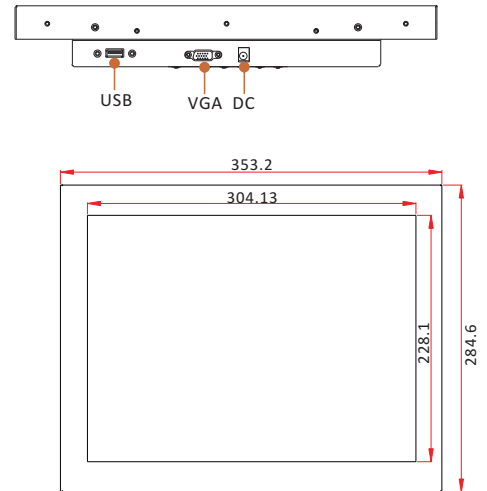

### Ordering Infomation

Model	Descriptions
GHK-15OP-T0000	15 inch IR Touch, 250nits LCD Panel

To find out more about our extensive range of Ghaik open frame touch products, go to [www.ghaik.com](http://www.ghaik.com), or email to [info@ghaik.com](mailto:info@ghaik.com)