



# 17" Industry Touch Monitor

## GHK-17IP-TC

### FEATURES

- SVGA (1280 x 1024) (350 cd/m2)
- VGA & DVI Signal Input
- 5 Wire Resistive Touch Screen (Optional)
- OSD Control on the Back Side
- DC 12V Power Input
- Support VESA Wall Mount and Embedded Mount



RoHS



17 inch  
TFT




IP65

## PRODUCT SPECIFICATIONS

LCD	
Panel Type	AU LCD Panel (Optional)
Resolution (pixel)	1280*1024
Display Area (mm)	337.920(H)x270.336(V)
Brightness (nit)	350nit (Optional)
Contrast Ratio	1000:1
Colors	16.7M
View Angle (U/D/L/R)	85/85/85/85
Backlight Lifetime	50000hrs
OSD Control	Auto Menu Select (+,-) Exit On/Off
Touch Screen	
Type	5 Wire Resistive
Resolution(pixel)	4096*4096
Transmittance	>90%
Interface	
Signal Input	VGA+DVI ( 15 Pin D-sub/DVI-D Connector )
Touch Connectors	USB / RS232(Optional)
Power	
Power Input	DC-in 12V=4A (50~61HZ)-DC Jack (2.0mm) & 3-PIN Industrial Connectors
Power Consumption	≤48W
Mechanical	
Material	Steel chassis
Mounting	Support VESA Wall Mount and Embedded Mount
Dimensions	390.5(H) x 312.5(V) x 49.0(D)
Environment	
Operating Temp	0~50C°
Storage Temp	-20~60C°
Relative Humidity	10~90% @40C° Non-condensing without touch screen
Vibration	1G peak,5~500Hz(Random)
Shock	15G peak acceleration (11msec.duration)
Rating	Facilitate installation of the demolition, solid portfolio
Ordering Information	
GHK-17IP-NC	17"Industry Monitor with VGA/DVI input and power adapter (250nit)
GHK-17IP-TC	17"Industry Touch Monitor with 5wire resistive touch screen,VGA/DVI input (350nit)

## DIMENSIONS

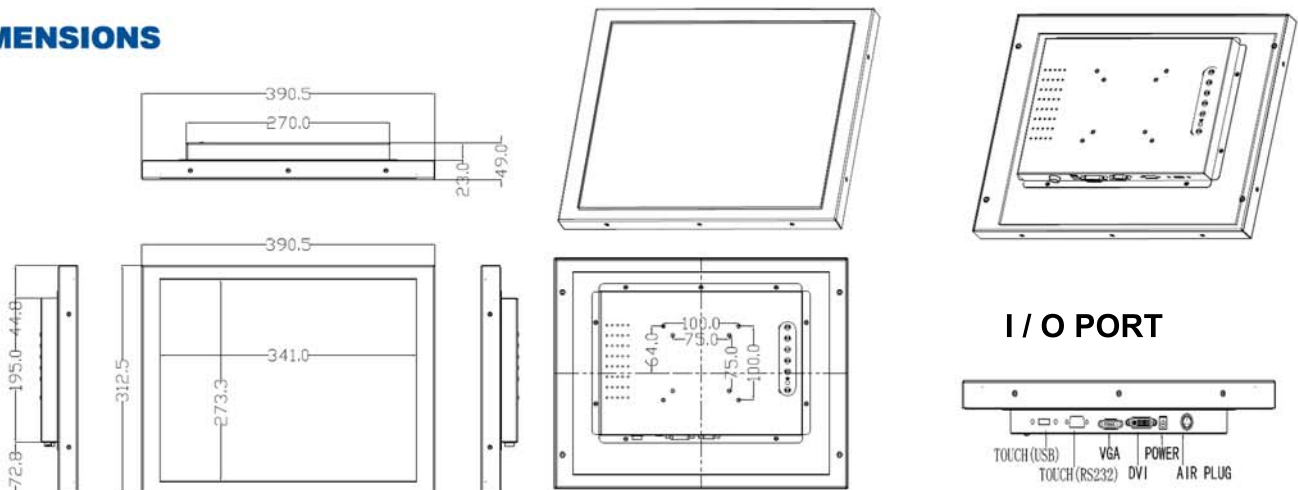

## I / O PORT